


## TP33AXX Cat.6A UTP Patch Cord

### Specification:

Boot: PVC, UL 94V-0(RoHS Compliant), same as cable(grey)  
 Cable: Cat.6 UTP PVC Cable 24AWG 4 pair, stranded, OD Ø6.0mm  
 Organizer: Zinc alloy, Nickel plated.  
 Qualified Cat.6A/Class<sup>A</sup>E(10G/500MHz)  
 Complied with IEC 60603-7 TIA/EIA-568-B.2-10  
 Verified in different lengths from 2 to 4-point topology to complete a Cat.6A channel

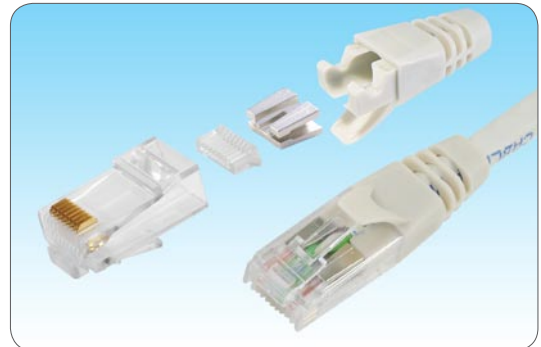

TA336A (plug)



TP33AXX

