

F21-E2 工業用 無線電遙控器

精巧掌握得心應手

輕巧耐用 / 安全可靠 / 經濟實惠

高穩定相鎖迴路(PLL)設計

- 可供多頻點操作
- 大幅降低干擾，操控更順暢

只須簡單的操作步驟

- 可用發射機複製備用的 e 卡
- 不須額外花費運用更具彈性

結合CRC及HAMMING技術

- 強化編碼解碼之正確性
- 操控更穩定可靠

發射機隱藏式天線

- 備有急停鈕及旋轉式開關鑰匙
- 可設定密碼開機管理更有效
使用更安全

發射機突破傳統

- 體積小重量輕觸感佳
- 掌控容易且得心應手
- 減少長時間操作帶來的疲憊感

多樣化的功能

- 單速按鍵可實現雙速功能
- 可由軟體規劃達成多種應用
- 發揮遙控器極致功能

獨特 e卡設計

- 隨插即用如SIM卡
可快速處理現場維護需求
- 工作上更具方便性、時效性



TELECRANE®
www.telecranetw.com

TELECRANE TAIWAN
Email: peng.w1688@msa.hinet.net
Tel: 06-233-9484
Fax: 06-233-9485



TELECRANE®

F21-E2 輕巧耐用 · 安全可靠 · 經濟實惠 工業用無線電遙控器

產品規格：

一般規格 操作距離 可達100公尺
 操作溫度 -40 °C ~ +85 °C
 識別碼 43億組不重複識別碼(32位元)
 漢明碼長度 ≥ 4

發射機 電 源 2顆三號(AA)鹼性/充電電池
 發射功率 小於10毫瓦
 按鍵數 單速按鍵：8個(上/下可設成雙速)
 緊急停止按鍵：1個 / 旋轉鑰匙開關：1個
 尺 寸 132 x 55 x 40 公厘
 重 量 220 公克(含電池)

接收機 電 源 24/48、48/110、48/220、110/220、220/380 VAC (50/60 Hz)
 、直流12-14 VDC，多種選擇。
 尺 寸 190 x 85 x 62 公厘
 重 量 950 公克(含電纜)



功能設定軟體：

F21-E2 遙控器可經由電腦軟體設定多種按鍵功能。

例如：普通、捺跳、電磁鐵、開及關、寸動、相互抑制、不相互抑制等；可適應各種不同類型之天車或機器設備使用。



選用配件：

USB (e卡) 連接線、應用軟體光碟



更多機型選擇 · 請造訪我們的網站
www.telecrane.com.tw

F21-E2 INDUSTRIAL Radio Remote Controller

Compact Ergonomic **Design**
Safe / Durable / Reliable

PLL Circuit

- Multi-Channel Selection
- Interference free

Ergonomic Transmitter

- Compact & Handy transmitter

CRC & Hamming Technology

- Enhanced encoding and decoding

Internal Antenna

- Equipped with EMS & rotary key switch
- Power-On by password for authorized operation

Programmable

- Computer software programmable
- A single step pushbutton works as double step pushbutton

e-Card

- USB Interface
- Plug & Play, just like SIM card
- e-Card duplicate via transmitter

 **TELECRANE**®
www.telecranetw.com

TELECRANE TAIWAN
Email: peng.w1688@msa.hinet.net
Tel: +886-6-233-9484
Fax: +886-6-233-9485





F21-E2

Durable / Safe / Reliable / Economic
Industrial Radio Remote Controller

TELECRANE®

Specification

General Operating Range : Up to 100 Meters
 Temperature Range : - 40°C ~ + 85°C
 ID code : 32 Bits ID Code with 4.3 Billion Sets Available (never repeated)
 Hamming Distance : ≥ 4

Transmitter Power Supply : Two 1.5 volts (AA Size) Alkaline / Rechargeable Batteries
 RF Power : < 10 mW
 Pushbutton : 1 EMS Button / 1 Rotary Key Switch
 8 Single step Button (UP / DOWN buttons are programmable as double speed through software)
 Dimensions : 132 x 55 x 40 mm.
 Weight : 220g (including batteries)




Receiver Power Supply : 24/48、48/110、48/220、110/220、220/380 VAC (50 / 60 Hz), 12-24 VDC.
 Dimensions : 190 x 85 x 62 mm.
 Weight : 950g (including cable)



Function Setting Software

To meet variety application requirements, F21-E2 software provides multi-function setting such as pushbutton in Normal (Momentary), Toggle, Magnetic, ON/OFF, and Interlock/Non-interlock modes.

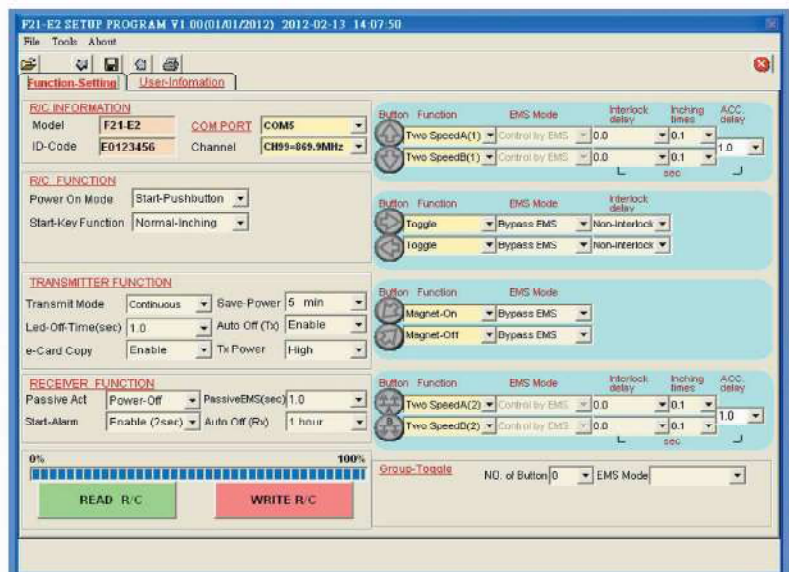

Optional accessories

Software CD & USB interface cable



Visit our website >>>

www.telecrane.com.tw