

# MLS-311




The **MLS-311** is point-to-point EoCNA (Ethernet over Coax Network) solution that efficiently extends 10/100 Ethernet circuits to over 800 meters (2,624 feet) at 160Mbps using existing coaxial wire. The MLS-311 will allow Ethernet connectivity in existing facilities without pulling extra cable. This is perfect solution to Ethernet on the factory floor where systems have been upgraded from slower serial communication to Ethernet networking. Installation is easy with a single switch setting. One end is set for local and the other remote. The MLS-311 is used in Coaxial wire to extend Ethernet connectivity over existing CCD/CATV grade Coaxial wire.

## Key Features

- ◆ High-Speed 160Mbps communications link over existing Coaxial Cable, Symmetrical on EoCNA
- ◆ 160Mbps @ up to 800 meters (2,624 feet), reach down to 4Mbps @ about 1.2Km (4,000 feet)
- ◆ Operates transparent to high layer protocols such as TCP/IP
- ◆ Auto-MDIX and Auto-sensing 10Base-T or 100Base-TX and Full or Half-Duplex on the Ethernet port
- ◆ Plug and Play design for simple installation, single switch config
- ◆ Status LEDs for simple monitoring of the device and connection status

## Applications

- ◆ Extend LAN connectivity to a remote site or between buildings
- ◆ Connect Ethernet over the different Room over existing house's Coaxial infrastructure
- ◆ Connect new controller technology on the factory floor using existing wiring
- ◆ Extend Ethernet connectivity from a backbone network to an isolated location via Coaxial wire
- ◆ Transmit Video and traffic controller information over existing Coaxial wire

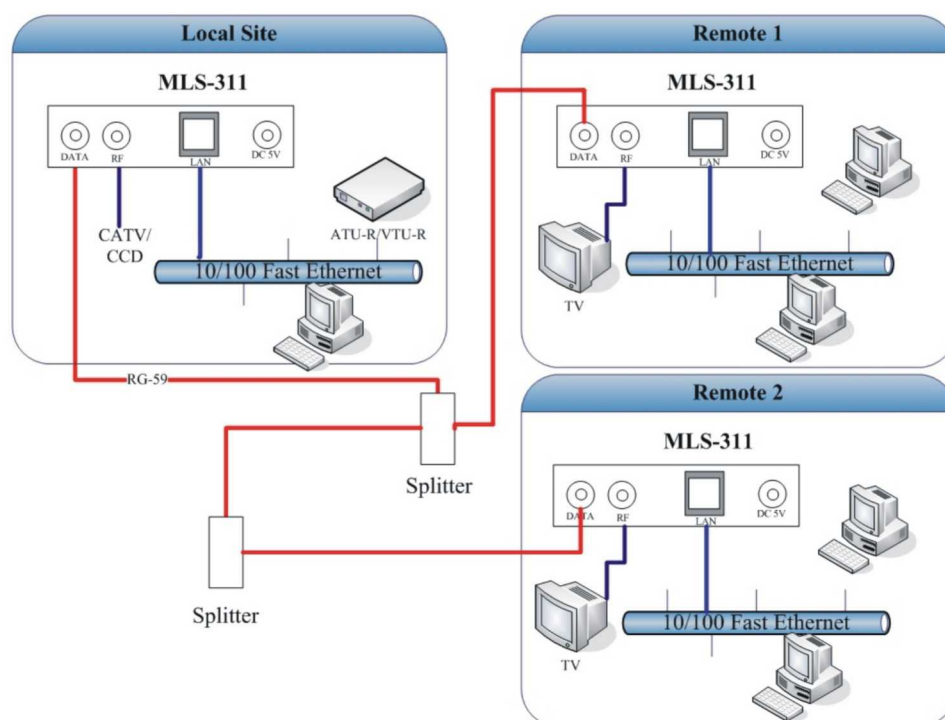

# MLS-311 Ethernet Extender over Coaxial Cable

## Technical Specifications

### Network Standards:

- ◆ ITU G.9954 , Ethernet Over Coaxial Network (EoCNA)
- ◆ IEEE802.3 10BASE-T, 10Mbit/s
- ◆ IEEE802.3u 100BASE-TX, Fast Ethernet at 100Mbit/s, Auto-negotiation
- ◆ IEEE802.3x Full Duplex and Flow Control

### Protocol:

- ◆ Transparent to higher layer protocols

### Connectors:

- ◆ Fast Ethernet : One RJ45 Connectors
- ◆ Coax : Two F-Type Female Coax Connectors , One for EoCNA , the other for TV

### Transmission Power and Spectrum:

- ◆ 0 +/-0.5 dBm
- ◆ 12-28 MHz

### Transmission Speed and Distance:

- ◆ Up to 160Mbps@800 meters
- ◆ Up to 4000 Feet (-176dBm/Hz Noise Floor)

### Fast Ethernet Interface:

- ◆ 10/100 Mbps
- ◆ MDI/MDI-X Auto Crossover

### Quality of Service:

- ◆ Priority Base on IEEE802.1p and TCP/UDP port
- ◆ Guaranteed QoS base on Layer II Parameterized QoS

### Network Management:

- ◆ Diagnosis of EoCNA function
- ◆ Secured/Isolated Communication between DEVs
- ◆ Provision/Denial of Service

### Indicators:

- ◆ "Power" LED
- ◆ EoCNA Link/Act , SyncMode LED
- ◆ LAN Link/Act LED

### Environmental Conditions:

- ◆ Operating Temperature : 0°C ~ 55°C (32°F~131°F)
- ◆ Storage Temperature : -10°C ~ 65°C (14°F~149°F)
- ◆ Operating Humidity : 10% ~ 90% , Non-condensing

### Power Requirement:

- ◆ External Power Supply : 5V DC
- ◆ Power Consumption : < 3.25 Watts

### Physical Dimension:

- ◆ 155mm(W) x 83mm(D) x 30mm(H)

### Unit Weight:

- ◆ 300 g

### Emissions Compliance:

- ◆ FCC part 15 Class B, CE Mark

## Ordering Information

### MLS-311:

- ◆ 10/100 TX Ethernet Extender over Coaxial Cable