



□172x151x38 mm
(□6.77x6x1.5 in)



Frame: Die cast aluminum, Painted Black

Impeller: Steel(black) **option** white/green/blue

Ambient Temperature Range: -10°C ~ +70°C

Operating Voltage Range: Rated Voltage ±10%

Bearing: Ball

Motor Structure: AC Induction Capacitor Motor

Motor protection: Thermal Protected (Auto Restart)

Termination: Terminals or Lead wire 300mm



Package: 820g / PC, 12PCS / CTN

Advantage

1. High airflow.
2. High stable.

Dimension (units:mm)

Characteristic Curves

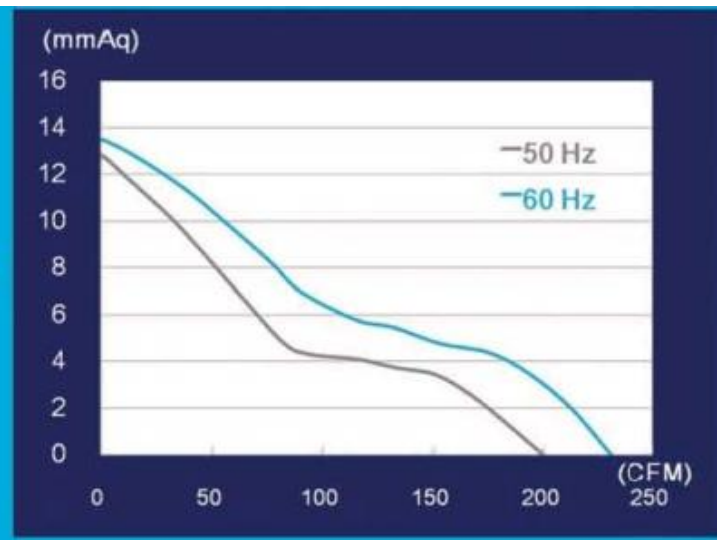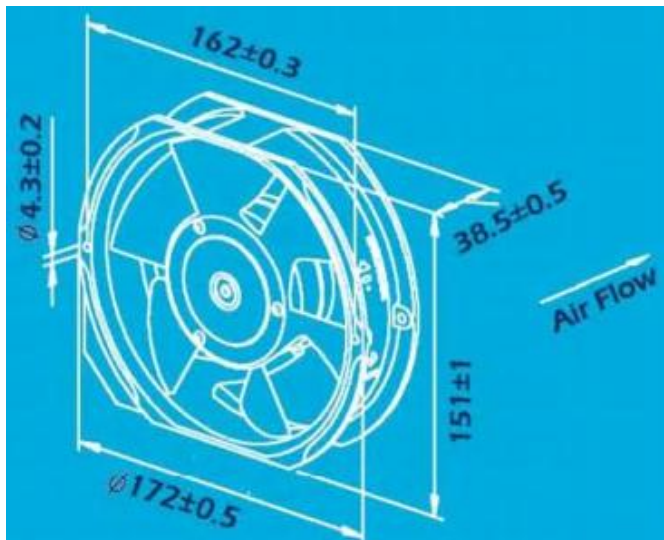

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmAq)	Noise (dB)
CYM11738HBT(L)	115	50/60	0.25/0.21	25/27	2700/3100	210/240	13.5/14.5	53/59
CYM11738MBT(L)	115	50/60	0.13/0.15	14/17	2400/2350	190/180	9.2/7.5	51
CYM21738HBT(L)	230	50/60	0.11/0.12	26/27	2700/3100	210/240	13.5/14.5	53/59
CYM21738MBT(L)	230	50/60	0.08/0.1	16/19	2400/2350	190/180	9.2/7.5	51
CYM31738HBT(L)	380	50/60		26/27	2700/3100	210/240	13.5/14.5	53/59