


型號說明 Ordering Code

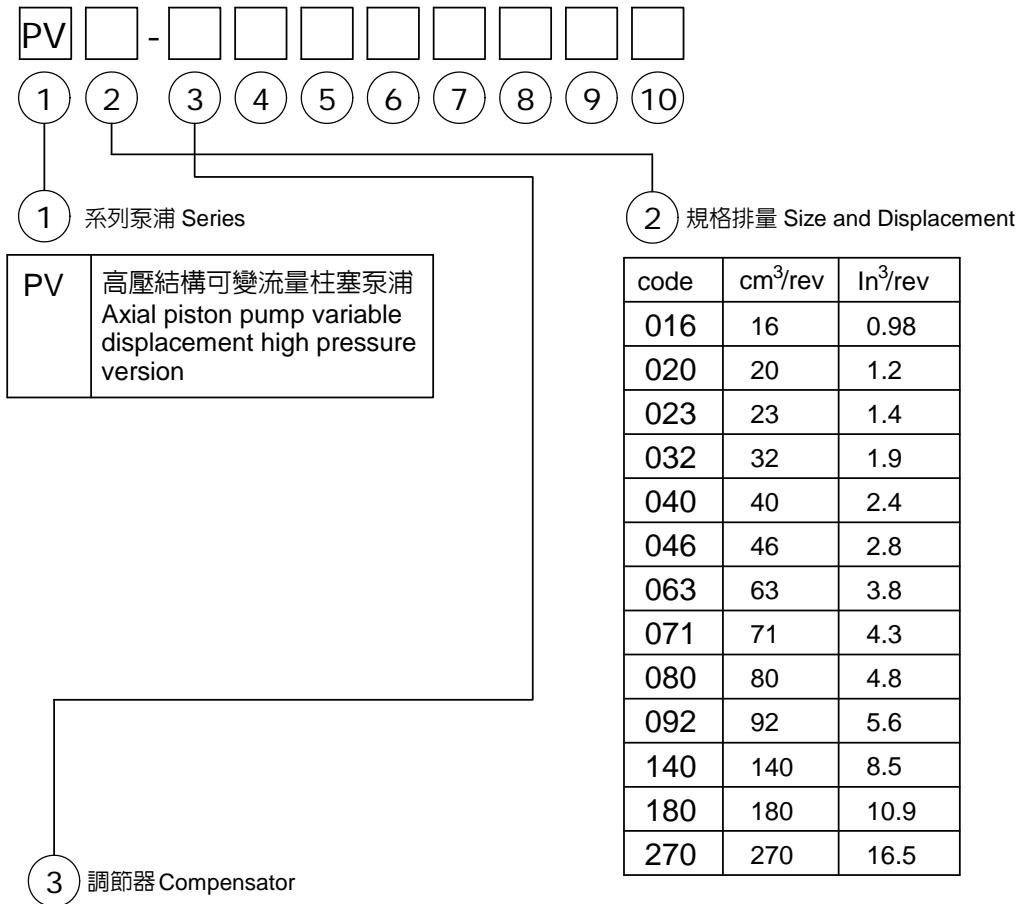

A	標準型壓力調節器 Standard Pressure compensator
---	---


遙控型 Remote Type

GT	遙控型調節器 Remote Pressure compensator
GM	疊式遙控型調節器 Remote Pressure compensator allows a pilot valve
GA	疊式遙控型調節器 +溢流閥 Remote Pressure compensator allows a pilot valve with NG6 interface (Relief valve included)
GJ	疊式遙控型調節器 +比例閥 Layer Proportional pressure compensator (Proportional valve included)

電控卸載型 Electrical unloading Type

GR	電控卸載型調節器 Electrical unloading
GD	電控卸載型調節器 +外接遙控 Electrical unloading with remote
GB	電控兩段壓力調節器 Dual pressure control
GE	電控兩段壓力調節器 +外接遙控 Dual pressure control with remote
GC	兩段壓力+電控卸載調節器 Dual pressure+ electrical unloading

型號說明 Ordering Code



3 調節器 Compensator

負載感應型 Load-sensing Type

HL	負載感應型調節器 Load-sensing compensator
HM	疊式負載感應型調節器 Load-sensing compensator with NG6 interface
HW	疊式負載感應型調節器 +溢流閥 Load-sensing compensator (Relief valve included)
HP	疊式負載感應型調節器 +比例閥 Load-sensing compensator (Proportional valve included)
HJ	疊式雙閥負載感應型調節器 2-valve load-sensing compensator with NG6 interface
HA	疊式雙閥負載感應型調節器 +溢流閥 2-valve load-sensing compensator (Relief valve included)
HY	疊式雙閥負載感應型調節器 +比例閥 2-valve load-sensing compensator (Proportional Valve included)

比例壓力、流量型 Proportional Pressure, flow Type

HQ	負載感應+比例流量調節器 Load-sensing & Proportional flow control
HF	雙閥負載感應+比例流量調節器 2-valve load-sensing & Proportional flow control
HK	負載感應+比例壓力+比例流量調節器 Load-sensing & Proportional Pressure ,Proportional flow control
HZ	雙閥負載感應+比例壓力+比例流量調節器 2-valve load-sensing & Proportional pressure ,Proportional flow control
B	油壓缸型 無段流量變速控制 Multi-stage Flow & Single-stage Pressure Compensator Control (With Cylinder)

比例回饋型 Proportional compensation Type

FV	比例流量+流量回饋控制 Proportional displacement with flow compensation
FR	比例壓力+比例流量+流量回饋控制 Proportional pressure, proportional displacement with flow compensation
FG	比例壓力+比例流量+壓力回饋控制+流量回饋控制 Proportional pressure, proportional displacement with pressure compensation & flow compensation

續下頁...

型號說明 Ordering Code

PV -

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩


③ 調節器 Compensator

恆功率、定馬力型 Horse power Type

PA <input type="checkbox"/>	疊式定馬力調節器 Horse power compensator with NG6 interface
PM <input type="checkbox"/>	疊式定馬力調節器 + 溢流閥 Horse power compensator with NG6 interface (Relief valve included)
PG <input type="checkbox"/>	定馬力+外控壓力調節器 Horse power compensator with remote
PL <input type="checkbox"/>	定馬力+外控壓力+負載感應調節器 Horse power compensator with remote & Load-sensing compensator
PH <input type="checkbox"/>	疊式定馬力 + 溢流閥+負載感應調節器 Horse power compensator with NG6 interface (Relief valve included) & Load-sensing compensator

代號 code	馬力 Horse power	PV016~ PV023	PV032~ PV046	PV063~ PV092	PV140	PV180	PV270
A	3 KW	●					
B	4 KW	●					
C	5.5 KW	●	●				
D	7.5 KW	●	●				
E	11 KW	●	●	●			
F	15 KW		●	●			
G	18.5 KW		●	●	●		
H	22 KW		●	●	●	●	
I	30 KW			●	●	●	
J	37 KW			●	●	●	●
K	40 KW			●	●	●	●
L	55 KW				●	●	●
M	75 KW					●	●
N	90 KW					●	●
O	110 KW						●
P	132 KW						●

型號說明 Ordering Code



4 壓力調整範圍 Pressure adjusting

code	(bar)	(PSI)
2	10 ~ 140	145 ~ 2030
3	40 ~ 210	580 ~ 3045
4	70 ~ 350	1015 ~ 5075

5 旋轉方向 Rotation

R	順時針方向 clockwise	
L	逆時針方向 counter clockwise	

6 連接方式 Mounting

M	公制規格 Metric	鍵型軸心 ISO 3019/2 cylind, key	
N F	英制規格 Inch	鍵型軸心 ISO 3019/2 cylind, key	
K	公制規格 Metric	花齒型軸心 ISO 3019/2 splined, DIN 5480	
D G	英制規格 Inch	花齒型軸心 ISO 3019/2 splined, SAE	

(詳細尺寸請參閱外觀尺寸圖)

8 螺紋 Threads

1	BSPP (G)
2	PT (RC)
3	UNF (SAE)
4	NPT
7	ISO 6149 (M)

9 電壓 Voltage

0	無電壓 None
A	AC100V (50/60HZ)
B	AC110V (60HZ)
C	AC200V (50/60HZ)
D	AC220V (60HZ)
E	DC 12V
F	DC 24V

10 油封 Seals

N	丁腈橡膠 NBR
V	氟橡膠 FPM
E	乙烯-丙烯 Ethylene-propylene

7 通軸裝配 Thru drive & 2nd pump

		PV016~ PV023	PV032~ PV046	PV063~ PV092	PV140~ PV180	PV270
A	單泵 Single pump	●	●	●	●	●
B	通軸為雙連準備 Prepared for thru drive	●	●	●	●	●
通軸具雙連介面 With adaptor for 2nd pump						
C	英制尺寸 Inch	SAE AA, Ø2" (Ø50.8 mm)	●			
D		SAE A, Ø3 1/4" (Ø82.55 mm)	●	●	●	●
E		SAE B, Ø4" (Ø101.6 mm)	●	●	●	●
F		SAE C, Ø5" (Ø127 mm)		●	●	●
G		SAE AA, Ø6" (Ø152.4 mm)			●	●
H		SAE AA, Ø6.5" (Ø165.1 mm)				●
I	公制尺寸 Metric	Metric, Ø63 mm	●	●		
J		Metric, Ø80 mm	●	●	●	●
K		Metric, Ø100 mm	●	●	●	●
L		Metric, Ø125 mm		●	●	●
M		Metric, Ø160 mm			●	●
N		Metric, Ø200 mm				●

(接受其他尺寸訂購)

Other pump are acceptable order